


Specifications

SMART Board® interactive whiteboard

Model 480

Physical specifications

Size	160.5 cm W × 127.2 cm H × 12.8 cm D (63 1/4" × 50" × 5 1/8")
Active screen area (maximum interactive projected image)	156.5 cm W × 117.3 cm H (61 5/8" × 46 1/8") 195.6 cm (77") diagonal
Weight	23.2 kg (51 lb.)
Shipping size	178 cm W × 136 cm H × 11 cm D 70" × 53 1/2" × 4 1/2"
Shipping weight	28.7 kg (63 lb. 3 oz.)

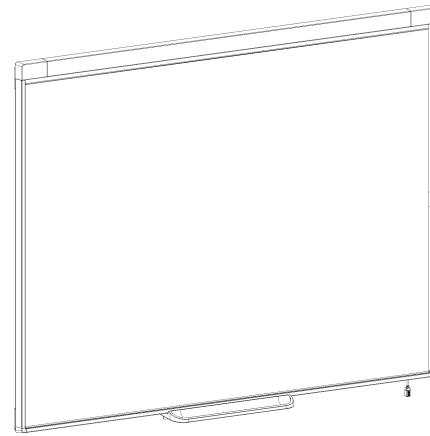

All dimensions +/- 0.3 cm (1/8"). All weights +/-0.9 kg (2 lb.).

Standard features

Software	You can install SMART Product Drivers and SMART Notebook™ collaborative learning software from the included DVD or from smarttech.com/downloads . Software upgrades are available from smarttech.com/software .
System requirements	Windows® operating systems and Linux® operating systems. Go to smarttech.com/kb/170144 or smarttech.com/kb/170110 for a complete list of system requirements.
Environmental compliance	China EIP, EU RoHS, EU WEEE, Packaging and US CPSIA

Extraordinary made simple®

SMART®

SPECIFICATIONS

SMART Board interactive whiteboard – Model 480

Regulatory certification CB, CE, CSA (U.S./Canada), FCC and VCCI

Warranty Your interactive whiteboard has a two-year limited equipment warranty. See warranty documents for details.

i NOTE

A digital projector isn't included with this model of SMART Board® interactive whiteboard. To take advantage of all your interactive whiteboard's interactive features, you must integrate it with a digital projector.

Cables Includes a 3 m (118") USB cable

Touch Enables you to write, erase and perform mouse functions by touching the interactive whiteboard with your finger or a pen

Multitouch gestures (Windows operating systems) Enables one user to perform a series of two-finger touches on the interactive whiteboard screen to navigate pages, change the look of an object and zoom in or out. You must enable gesture recognition in SMART Settings.

Dual touch (Windows operating systems) Enables two users to touch the interactive whiteboard at the same time and to simultaneously perform mouse functions. You must enable dual touch in SMART Settings.

Dual write (Windows operating systems) Enables two users to use their fingers to write on the interactive whiteboard at the same time. You must enable dual write in SMART Settings.

i NOTE

Dual write has limited functionality with SMART Board 400 series interactive whiteboards.

Pen Includes a pen

Resolution Digitizing resolution is approximately 32767 × 32767

Screen surface The hard-coated steel surface is durable, optimized for projection, compatible with dry-erase markers and easily cleaned with whiteboard cleaner or isopropyl alcohol.

Digitizing technology DViT® (Digital Vision Touch) technology

Frame finish Dark gray (approximates PANTONE® Charcoal Gray 18-0601 TPX)

Power requirements Obtains power from the computer through the USB cable for Windows and Linux computers. Power consumption is less than 0.5 W (100 mA at 5V).

SPECIFICATIONS

SMART Board interactive whiteboard – Model 480

Computer connection 12 Mbps USB connection (full-speed USB 1.1 or USB 2.0)
Your SMART Board 480 interactive whiteboard supports one computer connection on a primary display only.

Temperature specifications

Storage -40°C to 50°C (-40°F to 122°F)


SMART order numbers

SB480 195.6 cm (77") diagonal SMART Board 480 interactive whiteboard

Optional accessories

For more information on additional accessories for your SMART Board 480 interactive whiteboard, see smarttech.com/accessories.

Physical dimensions

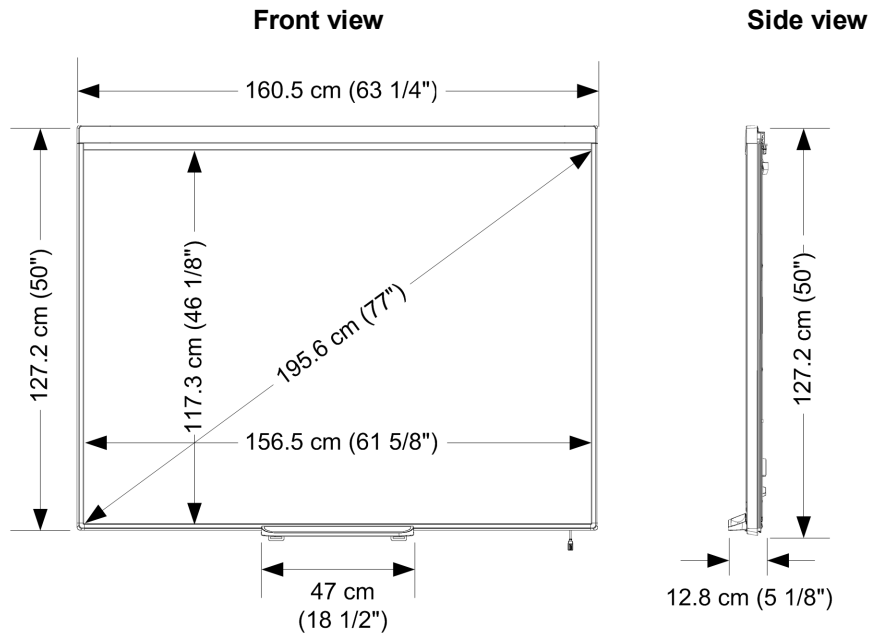

smarttech.com/support
smarttech.com/contactsupport

© 2010–2012 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, DVIT, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows is either a registered trademark or a trademark of Microsoft Corporation in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. One or more of the following patents: US6320597; US6326954; US6741267; US6803906; US6954197; US7151533; US7184030; US7236162; US7342574; US7379622; US7532206; US7619617; US7629987; US7692625; US7751671; US7757001; USD612396; USD616462; USD617332; and USD636784. Other patents pending. Contents are subject to change without notice. 05/2012.